




caratteristiche
TECNICHE

> REGOLATORI elettrici

per VIBROALIMENTATORI

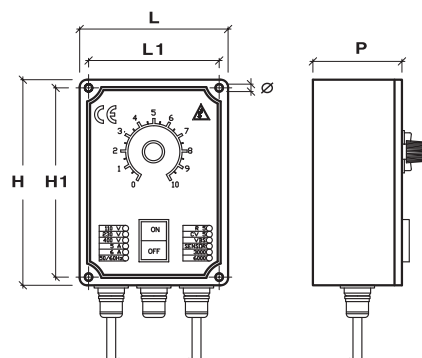

Modello	H mm	H1 mm	L mm	L1 mm	P mm	Ø mm	V	H.z.	A mm	Vibrazioni
R3F	105	65	105	65	65	5	110/230	50/60	2,5	3000/6000
R3F S/S	140	120	115	100	60	6	110/230	50/60	3	3000/6000
R5F	170	130	135	96	85	6	110/230	50/60	6	3000/6000
R5F + PRX92	170	130	135	96	85	6	110/230	50/60	6	3000/6000
CV 5	250	170	130	140	111	8,5	110/230	50/60	6	3000/6000
CV 10	262	100	202	210	140	10	*	50/60	10	3000/6000
CV 20	352	190	202	210	140	10	*	50/60	20	3000/6000
CV 40	352	190	274	282	140	10	*	50/60	40	3000/6000
CV 70	412	240	312	328	140	13	*	50/60	70	3000/6000
CV 100	462	240	372	400	235	13	*	50/60	100	3000/6000

* Tensione VOLT da specificare al momento dell'ordine: 110 / 230 / 380 / 415 / 440 / 460 / 480 *



SOLUZIONI
di asservimento

DECA S.r.l.

Via Paolo Vitalba 9/c - 23801 Calolziocorte (LC) - Italy

Tel. +39 0341 632080 - Fax. +39 0341 608154 - info@decasrl.biz - www.decasrl.biz

PRODOTTI personalizzati